


**SECTION A-A**

**SPECIFICATIONS**

PROPERTY	TEST METHOD	2125
GRAB TENSILE	ASTM D4632	WARP 110 FILL 90
U.V. RESISTANCE (STRENGTH RETAINED)	ASTM D4355	70
PERMITTIVITY	ASTM D4491	15

A STURDY, LIGHTWEIGHT SUNLIGHT RESISTANT, WOVEN POLYPROPYLENE.

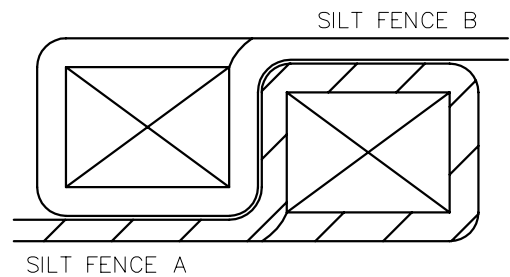

**NOTE**  
FABRIC TO BE WRAPPED AROUND FENCE POST

C					
B					
A					
	DESCRIPTION	DRW	CKD	APP	DATE
REVISIONS					
DRAWN BY: S.D.A.					
CHECKED BY: S.D.A.					
APPROVED:					

**EROSION CONTROL,  
(SILT) FENCE**

SCALE: NONE

CITY OF DETROIT  
WATER AND SEWERAGE  
DEPARTMENT  
ENGINEERING  
DIVISION

SHEET 1 OF 1

DWG No. 01014-02