

PRUNE 20% OF BRANCHES,
RETAINING NORMAL PLANT
SHAPE, DO NOT CUT
LEADERS.

TREE SHALL BEAR SAME
RELATION TO FINISH GRADE
AS IN NURSERY.

TWO PLY REINFORCED RUBBER
HOSE, POSITIONED DIRECTLY
ABOVE TREE BRANCH.

12 GAUGE GALVANIZED
DOUBLE STRAND TWISTED
WIRE.

3-2X2 HARDWOOD STAKES
PLACED 120 DEGREES APART.
STAKES TO EXTEND 18"
BELOW TREE PIT IN
UNDISTURBED SOIL.

TREE WRAP

3" MULCH


3" SAUCER

REMOVE BURLAP FROM TOP
ONE THIRD OF BALL. REMOVE
ALL PLASTIC WRAP AND ROT
PROOF WRAP.

PLANTING MIXTURE

SCARIFY SETTING BED TO 3" DEPTH

SET BALL ON
6" COMPACTED
TOPSOIL

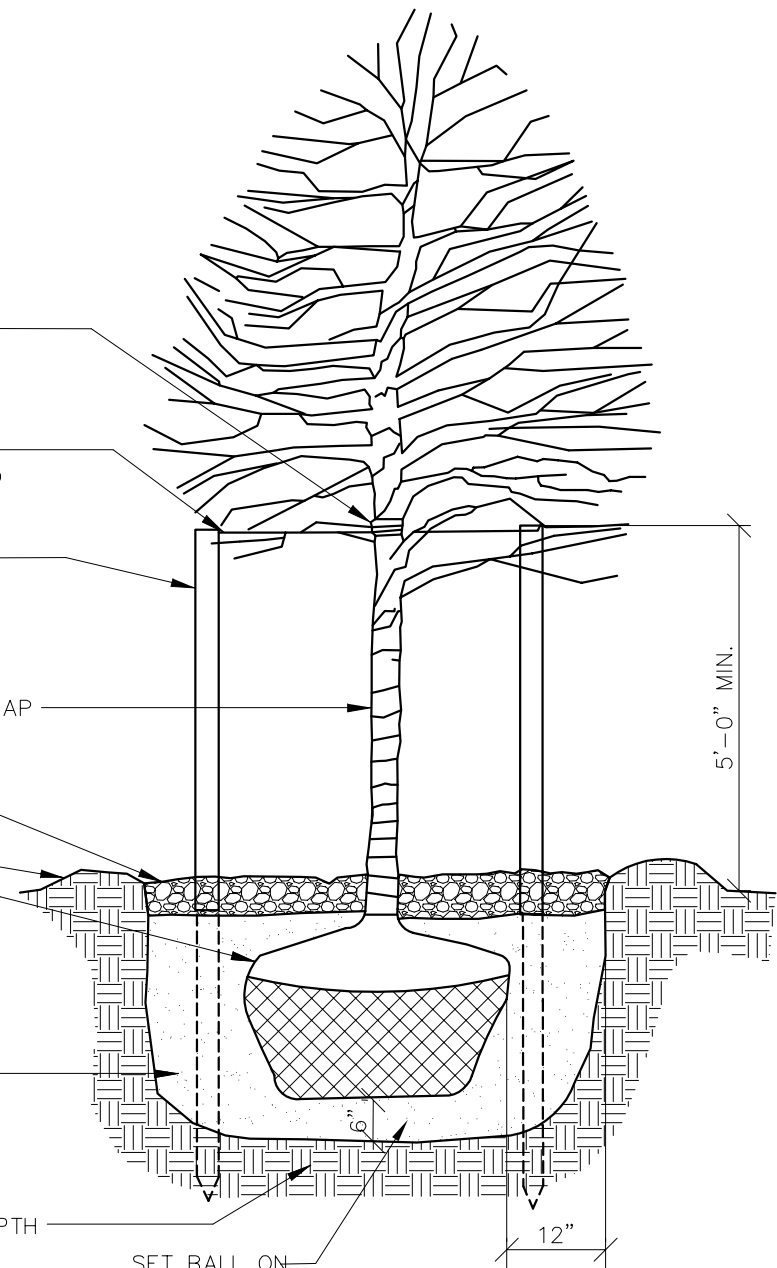

C					
B					
A					
	DESCRIPTION	DRW	CKD	APP	DATE
REVISIONS					
DRAWN BY: S.D.A.					
CHECKED BY: S.D.A.					
APPROVED:					

PLANTING, DECIDUOUS TREE

SCALE: NONE

CITY OF DETROIT
WATER AND SEWERAGE
DEPARTMENT
ENGINEERING
DIVISION

SHEET 1 OF 1

DWG No. 02900-02